


DATA SHEET

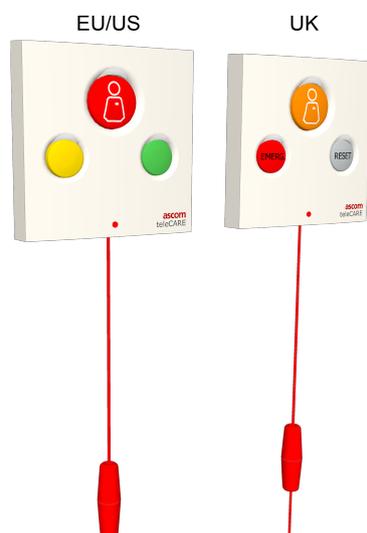

Pull Cord Module - Passive

Features

- Is connected to the passive bus of the doorside module or the active toilet cancel module
- Does not require an address on the room bus as it is connected to the doorside module
- Design for use in bathrooms, toilets and similar areas
- Call activated by a 2m (79in) long pull cord or by pressing the red button
- Three function buttons
- Available with gray or white body

Technical Specifications

NIPC Passive 3 Button Overview

Item	EU: NIPC-G3P: body gray (NCS S 2005 - R80B)
	EU/US: NIPC-W3P: body white (NCS 0603-G80Y)
	UK: NIPC-WBP: body white (NCS 0603-G80Y)
Material	PC/ABS, Flammability class: HB
Button Color	Red: (NCS S 0580 - Y90R)
	Green: (NCS S 2060 - G)
	Yellow: (NCS S0550 - G90Y)
	Amber: (NCS S 2070-Y50R)
	Gray: (NCS S2005 - R80B)
Dimensions (W x H x D)	91 x 91 x 19 mm (3.58 x 3.58 x 0.75 in)
Installed dimensions with backplate/ spacer (W x H x D)	With EU backplate: 91 x 91 x 19 mm (3.58 x 3.58 x 0.75 in)
	With EU Spacer: 91 x 91 x 42mm (3.58 x 3.58 x 1.65 in)
	With US backbox: 91 x 113.8 x 17 mm (3.58 x 4.48 x 0.67 in)
	With US spacer: 91 x 113.8 x 31 mm (3.58 x 4.48 x 1.22 in)
Pull cord	1 x plastic covered nylon cord length 2m (79in), red barrels
Electrical connections	1 x 4-pin connector for the passive bus
Power input	5.5Vdc (from the room bus)
Current consumption	idle: 0mA
	maximum: 10mA at 5.5Vdc
Hardware compatibility	NIDM, NITC
Software compatibility	teleCARE IP
Mounting	EU or UK style electrical boxes
Compatible electrical boxes (metal or plastic)	US: RACO models (or equivalent) 1-gang: 690, 695
	EU: Single backbox with mounting holes 60mm (2.36in.)
	UK: MK Honeywell models (or equivalent) 1-gang: 861ZIC, 866ZIC, 877ZIC
	Note: UK backboxes require a single (NUMP86-HK) mounting plate.

Specifications are subject to change without notice

Environmental

Operating temperature:	0°C to 50°C (32°F to 122°F)
Storage temperature:	-25°C to 55°C (-13°F to 131°F)
Relative Humidity:	0 to 95%, non condensing at 40°C (104°F)
Enclosure protection rating:	IP40

Regulatory Compliance EU/EFTA

	RoHS 2011/65/EU, RoHS3 2015/863/EU and RED 2014/53/EU
Complies with the relevant dates and amendments of the following EN standards (the valid references to dates and amendments are stated in the Declaration of Conformity):	EN 55032
	EN 301 489-1, EN 301 489-3, EN 300 330
	EN 62368-1

Regulatory Compliance US/CAN

	ANSI/UL 2560
	CAN/CSA C22.2 No. 205
	FCC part 15B
	ICES-003

Accessories

Accessories	NICT-4AA: Connector terminal 4-pole
	660098 Pull Cord Replacement Kit
	R280920: Backplate, single - gray
	R281145: Backplate, single - white
	R280926: Spacer with installation kit - gray
	R281149: Spacer with installation kit - white
	660438 US backplate single-gang
	660441 US spacer

Specifications are subject to change without notice

Ascom (Sweden) AB

Grimbodalen 2

SE-417 49 Göteborg

Sweden

Phone +46 31 55 93 00

www.ascom.com

ascom